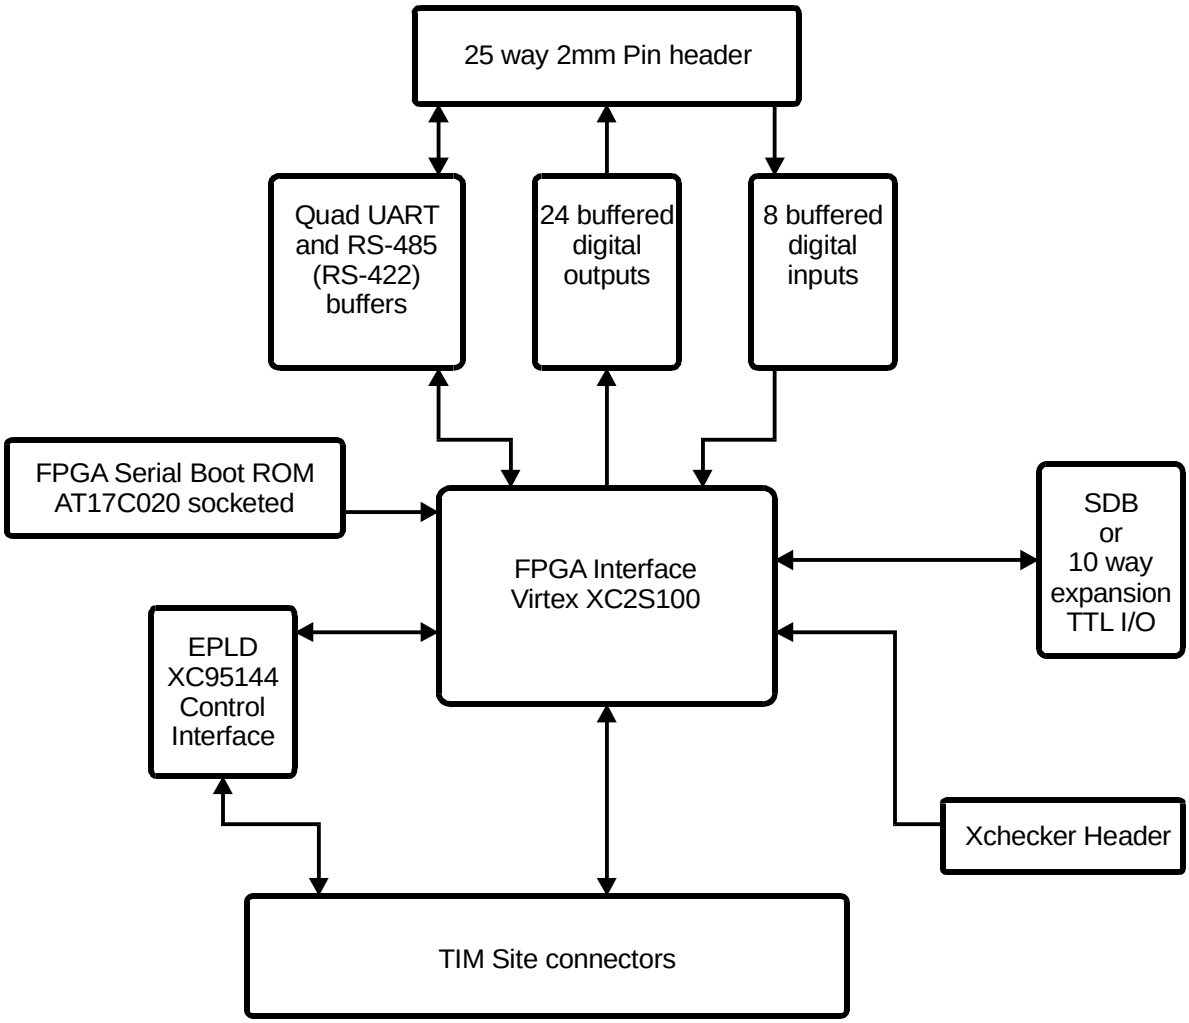
25 way 2mm Pin header
Quad UART and RS-485 (RS-422) buffers
24 buffered digital outputs
8 buffered digital inputs
FPGA Serial Boot ROM AT17C020 socketed
FPGA Interface Virtex XC2S100
SDB or 10 way expansion TTL I/O
EPLD XC95144 Control Interface
Xchecker Header
TIM Site connectors